
vetonit SAVETO

DO IT ONCE

Sealants and Joints

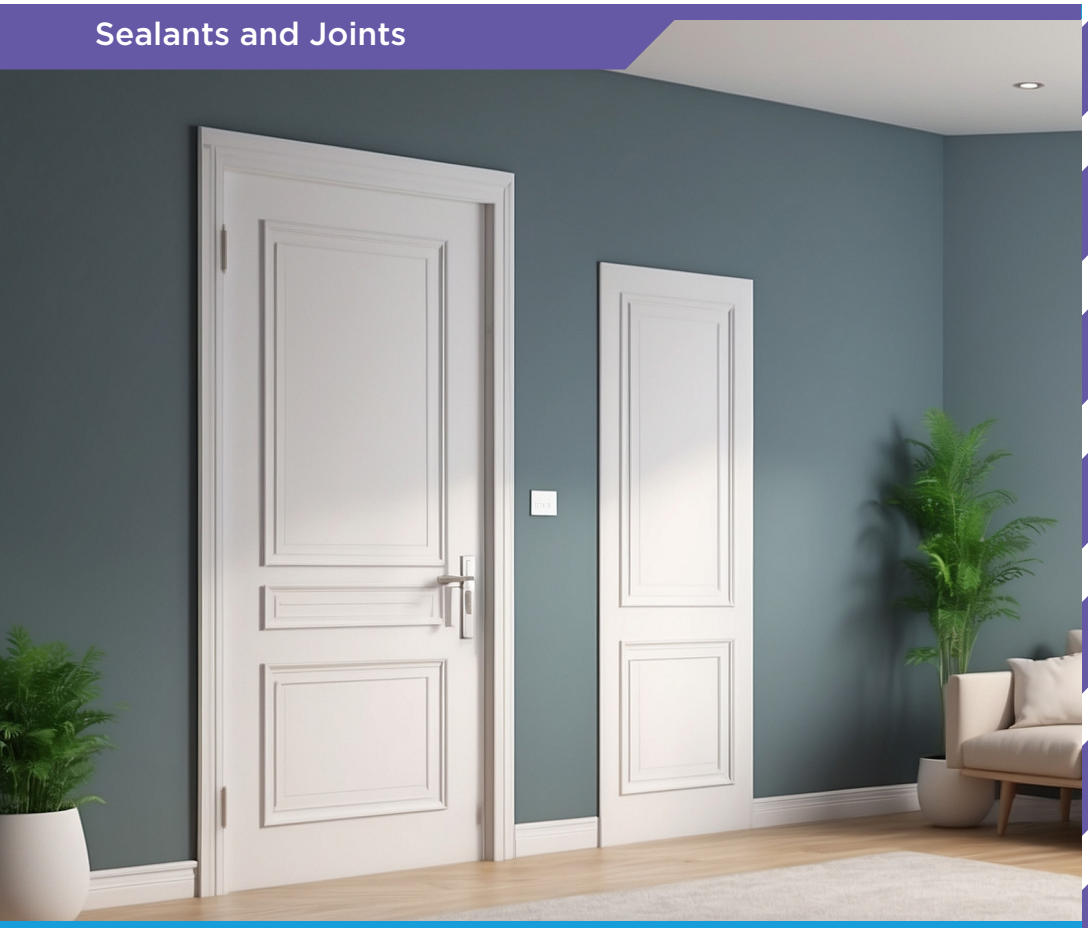

Vetoflex
PU780

Tel: 800 124 9009
www.saveto.com



Vetoflex
PU780





Description

A high-performance, single-component, elastomeric polyurethane sealant that cures with moisture to provide a water-resistant, low-modulus joint seal. It is designed for movement and connection joints in both indoor and outdoor environments. Once cured, it is weather-resistant and paintable.

Uses

- Multi-purpose solution for sealing and bonding a wide range of construction materials such as concrete, steel, and wood.
- Primerless sealing of pre-cast panel joints and expansion joints
- General elastic adhesive for bonding materials with dissimilar properties and thermal expansion coefficients
- Sealing of movement and static joints in various construction applications

Advantages

- Weather-resistant; suitable for both external and internal applications
- Easy to apply using a caulking gun
- Paintable with non-solvent or water-based paints after curing in static joints
- Does not crack or craze under UV exposure
- Non-sagging and non-staining
- Primerless application with strong adhesion to most building materials
- Excellent movement accommodation

ڤيتوفليكس
بي يو ٧٨٠



الوصف

مالئ فواصل عالي الأداء، أحادي المكون، مرن، من البولي يوريثان، يتصلب بفعل الرطوبة ليُشكل فاصلاً مرناً مقاوماً للماء للفواصل المتحركة وفواصل التمدد الداخلية والخارجية. بعد اكتمال المعالجة، يصبح مقاوماً للعوامل الجوية وقابلاً للطلاء.

الاستخدامات

- متعدد الاستخدامات يمكن تطبيقه على مجموعة واسعة من الأسطح مثل الخرسانة والحديد والخشب.
- سد الفواصل في الألواح الخرسانية مسبقة الصب والفواصل التمددية دون الحاجة إلى طبقة أساس
- لاصق مرن عام للمواد ذات الخصائص ومعاملات التمدد الحراري المختلفة
- سد الفواصل المتحركة والثابتة في مختلف متطلبات قطاع البناء

المزايا

- مقاوم للعوامل الجوية، ومناسب للتطبيقات الداخلية والخارجية
- سهل التطبيق باستخدام مسدس السد
- قابل للدهان باستخدام الدهانات غير المذيبة أو القائمة على الماء بعد المعالجة في الفواصل الثابتة
- لا يتشقق أو يتكسر عند التعرض للأشعة فوق البنفسجية
- لا يسيل ولا يترك بقعاً
- لا يتطلب استخدام طبقة أساس، ويتميز بقوة التصاق عالية بمعظم مواد البناء
- قدرة ممتازة على استيعاب الحركة

Instructions of Use طريقة الاستخدام



ساڤيتو

مواد ملء الفواصل



ڤيتوفليكس
بي يو ٧٨٠

هاتف: ٨٠٠١٢٤٩٠٠٩
www.saveto.com